


CS-iWPT302-P无线蓝牙压力传感器


CS-iWPT302-P Wireless Bluetooth Pressure Sensor



- ★ 尺寸小巧、方便安装
Compact size, easy to use
- ★ 温压一体监测
Temperature & pressure integrated
- ★ 测量精度高
High Measurement Accuracy
- ★ 磁钢激活
Magnet activation
- ★ 定时采样
Regular sampling & broadcasting
- ★ 配套小程序查看数据
View data on APP

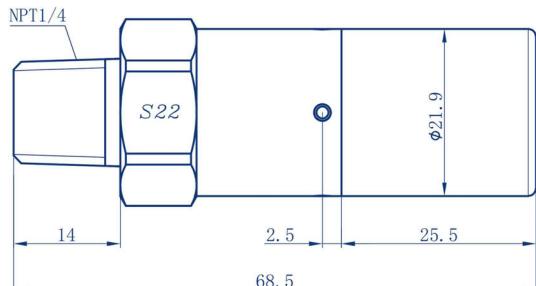

单位Unit: mm

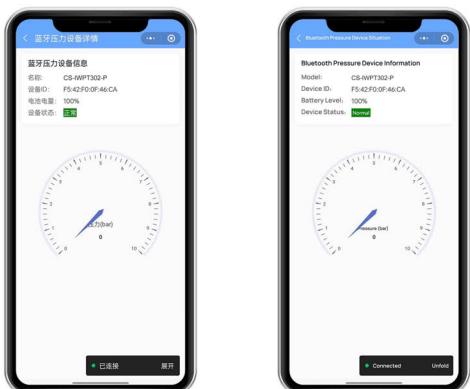 手机小程序
APP


应用领域

Application

适用于测量泵、压缩机、液压机、机械、挖掘机、气动设备的压力

For pressure measurement for pumps, compressors, hydraulic machinery, excavators, pneumatic equipment

 传输方式
Communication Mode

Bluetooth 5.1

 供电方式
Power Supply

3.6VDC Lithium Battery

 电池寿命
Battery Life

> 6 Years

 压力量程
Pressure Range

2/5/10/20/50bar

 压力精度
Pressure Accuracy

±0.5%F.S. @25°C

 温度量程^①
Temperature Range

-40°C ~ 85°C

 温度精度
Temperature Accuracy

±2°C

 采样间隔
Sampling Interval

2~180s

 广播间隔
Broadcast Interval

1~10s

 防护等级
Ingress Protection

IP65

注1：此温度为产品内部环境温度

Note 1: This temperature is the internal ambient temperature of the product

西安中星测控有限公司
 Xi'an Chinastar M&C Ltd

 400 029 2168

⑧ 西安市高新区上林苑四路1309号A座6层

F6, Building A, No.1309 Shanglinyuan 4 Road, xi'an, China

+86-29-88325620

 +86-29-88237768

sales@websensor.com

 710119

 公司官网
Official Website


 微信公众号
WeChat Official Account

CS-iWPT302-T无线蓝牙温度传感器

CS-iWPT302-T Wireless Bluetooth Temperature Sensor



- ★ 测温元件：铂电阻
Temperature measuring element: platinum
- ★ 尺寸小巧、方便安装
Compact size, easy to use
- ★ 磁钢激活
Magnet activation
- ★ 支持上下限报警阈值设置
Upper and lower alarm points setup
- ★ 定时采样
Regular sampling & broadcasting
- ★ 配套小程序查看数据
View data on APP

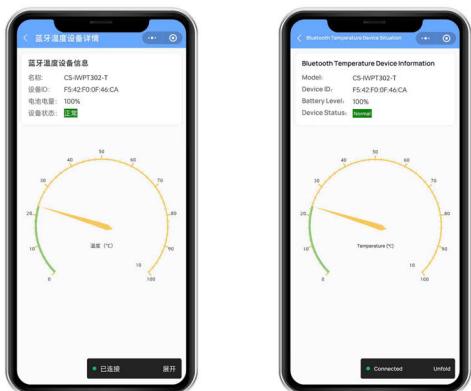

手机小程序
APP

应用领域
Application

适用于工厂罐体温度监控、温度巡查
For temperature monitoring and temperature inspection of plant tanks

传输方式
Communication Mode

Bluetooth 5.1

供电方式
Power Supply

3.6VDC Lithium Battery

电池寿命
Battery Life

> 6 Years

温度量程
Temperature Range

-40°C ~ 85°C

温度精度
Temperature Accuracy

±1°C、±2°C

采样间隔
Sampling Interval

2~180s

广播间隔
Broadcast Interval

1~10s

浸入管直径
Immersion Tube Diameter

Φ6mm

防护等级
Ingress Protection

IP65

注2: 温度量程短时内最高可测量至125°C

Note 2: The temperature range can be measured up to 125 °C in a short period of time

西安中星测控有限公司
Xi'an Chinastar M&C Ltd

400 029 2168

西安市高新区上林苑四路1309号A座6层
F6, Building A, No.1309 Shanglinyuan 4 Road, Xi'an, China
+86-29-88325620 +86-29-88237768
sales@websensor.com 710119



公司官网
Official Website



微信公众号
WeChat Official Account